


SBT

Kademeli Sirkülasyon Pompaları

Gear	P1 (W)	In (A)
3	245	1.1
2	190	0.85
1	135	0.60

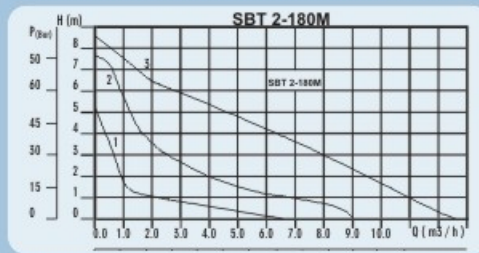


Parameter of performance :

Model	Size (mm)					Weight (kg)		Dimension (m³)
	H	H1	L	G	B	N.W.	G.W.	
SBT 2-180M	160	130	180	2 to 1 1/4 or 1 1/2	150	4.2	4.5	0.008



Gear	P1 (W)	In (A)
3	100	0.45
2	70	0.35
1	55	0.25

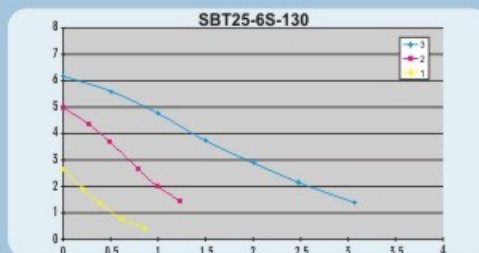


Parameter of performance :

Model	Size (mm)					Weight (kg)		Dimension (m³)
	H	H1	L	G	B	N.W.	G.W.	
SBT 25-6S-130	130	105	130/180	1 1/2 to 1	130	2.7	2.9	0.004



Gear	P1 (W)	In (A)
3	100	0.45
2	70	0.35
1	55	0.25

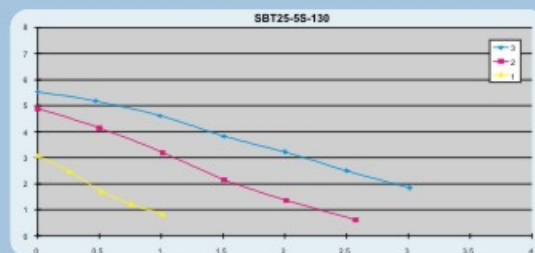


Parameter of performance :

Model	Size (mm)					Weight (kg)		Dimension (m³)
	H	H1	L	G	B	N.W.	G.W.	
SBT 25-5S-130	130	105	130/180	1 1/2 to 1	130	2.7	2.9	0.004



Gear	P1 (W)	In (A)
3	100	0.45
2	70	0.35
1	55	0.25

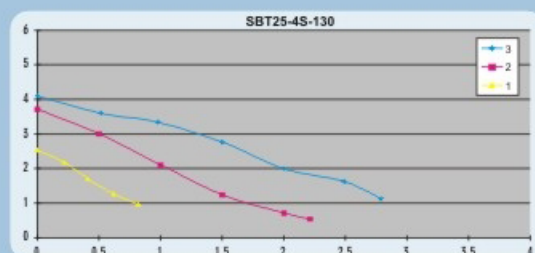



Parameter of performance :

Model	Size (mm)					Weight (kg)		Dimension (m³)
	H	H1	L	G	B	N.W.	G.W.	
SBT 25-4S-130	130	105	130/180	1 1/2 to 1	130	2.7	2.9	0.004





CIRCULATOR PUMP

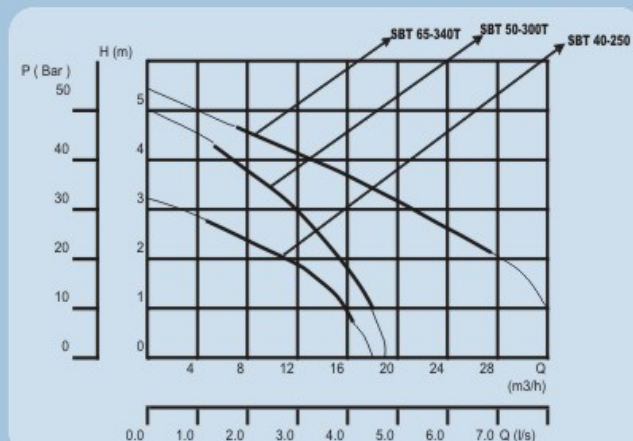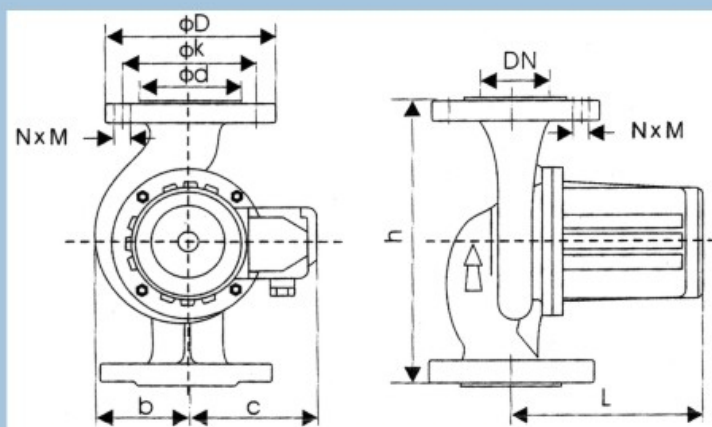

MODEL	INPUT POWER P1(W)	CURRENT(3-380V) (A)	CURRENT(1-220V) (A)	RATED SPEED n(r/min)
SBT 40-250T	160	0.39	0.78	1380
SBT 50-300T	300	0.71	1.38	1390
SBT 65-340T	550	1.36	3.1	1390

mounting dimensions (mm)

Weight
(Kg)

D	K	d	DN	N x M	b	c	h	L	N.W.
130	100	80	40	4 x 14	84	110	255	168	14
140	110	90	50	4 x 14	94	109	300	202	19
160	130	110	65	4 x 14	126	128	340	250	30,5